

03-09-00

A

JCS53 U.S. PTO
03/08/00ASSISTANT COMMISSIONER OF PATENTS AND TRADEMARKS
Washington, DC 20231PATENT
Date: March 8, 2000
File No. 1924.63656

Sir:

Transmitted herewith for filing is the patent application of

Inventor(s): Takahisa Hatakeyama, Makoto Yoshioka,
Yuji Miyazawa

I hereby certify that this paper is being deposited with the United States Postal Service as Express Mail in an envelope addressed to: Asst. Comm. for Patents, Washington, D.C. 20231, on this date.

03/08/00
Date

Express Mail Label No.: EL409491095US

For: CONTENT USAGE CONTROL SYSTEM, CONTENT
USAGE APPARATUS, COMPUTER READABLE
RECORDING MEDIUM WITH PROGRAM RECORDED
FOR COMPUTER TO EXECUTE USAGE METHOD

Enclosed are:

- (X) 55 pages of specification, including 11 claims and an abstract.
 (X) an executed oath or declaration, with power of attorney.
 () an unexecuted oath or declaration, with power of attorney.
 () sheet(s) of informal drawing(s).
 (X) 23 sheet(s) of formal drawings(s).
 (X) Assignment(s) of the invention to FUJITSU LIMITED.
 (X) Assignment Form Cover Sheet.
 (X) A check in the amount of \$ 40.00 to cover the fee for recording the assignment(s) is enclosed.
 (X) Information Disclosure Statement.
 (X) Form PTO-1449 and cited references.
 () Associate power of attorney.
 (X) Priority Document.

Fee Calculation For Claims As Filed

- a) Basic Fee \$ 690.00
 b) Independent Claims 6 - 3 = 3 x \$ 78.00 = \$ 234.00
 c) Total Claims 11 - 20 = x \$ 18.00 = \$
 d) Fee for Multiple Claims \$260.00 = \$

Total Filing Fee \$ 924.00

- () Statement(s) of Status as Small Entity, reducing Filing Fee by half to \$
 (X) A check in the amount of \$ 924.00 to cover the filing fee is enclosed.
 (X) The Commissioner is hereby authorized to charge any additional fees which may be required to this application under 37 C.F.R. §§1.16-1.17, or credit any overpayment, to Deposit Account No. 07-2069. Should no proper payment be enclosed herewith, as by a check being in the wrong amount, unsigned, post-dated, otherwise improper or informal or even entirely missing, the Commissioner is authorized to charge the unpaid amount to Deposit Account No. 07-2069. A duplicate copy of this sheet is enclosed.

Suite 8660 - Sears Tower
233 S. Wacker Drive
Chicago, Illinois 60606
(312) 993-0080

GREER, BURNS & CRAIN, LTD.

By Patrick G. Burns
Patrick G. Burns
Registration No. 29,367JCS53 U.S. PTO
03/08/00
09/521646

03/08/00 09:52:16

03-08-00

Date

Express Mail Label No.: EL409491095US

CONTENT USAGE CONTROL SYSTEM, CONTENT

USAGE APPARATUS, COMPUTER READABLE RECORDING MEDIUM

WITH PROGRAM RECORDED FOR COMPUTER TO EXECUTE USAGE METHOD

5 FIELD OF THE INVENTION

The present invention relates to a content usage control system for controlling the usage of the content supplied by the persons having the right to supply information such as copyright holders through an open network, a content usage apparatus.

10 This invention also relates to a computer readable recording medium with a program recorded therein for the computer to execute a usage method.

BACKGROUND OF THE INVENTION

15 The currency plays a role in supplying the people with an award fairly in accordance with the property of the current as a material. The object called the currency is not a mere common oral concept, but a physical object, the essential conditions of which is portability and the difficulty to forge
20 by other than the source. The physical property and the portability makes it possible to confirm the value of the currency among the users, while the difficulty of forging permits the source to control the fair chance of confirmation. With the recent development of the industry and technologies,
25 however, the days are numbered before the difficulty to forge

the currency is collapsed. A new object to confirm the value other than the currency is required. Such an object is also required to be physical, portable and difficult to forge. Further, it is required to be accessed and controlled by the source.

In addition to the security requirement described above, demand is rising for realization of "massive distribution" due to the multiplication of distribution and the increased capacity and speed of information. The environment that realizes the "massive distribution" satisfies the following conditions:

(1) The information users can acquire digital information substantially free of charge.

(2) The information suppliers can define the conditions for permitting the usage of the information (charge, change in conditions for usage, etc.) and forcibly execute the conditions agreed by the users.

(3) The additional operation required for the information users to use the service is at most "to confirm the access conditions".

A system that can execute the access control of the massive distribution accurately and safely is expected to contribute to the correction of unfair collection of the royalty such as the license fees. In the current system, the supplier cannot gain a profit unless a copyrighted object sells in a

considerable amount. However, a system is required for permitting the copyright holders to gain the profit accurately. It is also necessary that the consideration is fairly distributed in an amount according to the service fees offered
5 by all the persons involved including the professional artists and designers creating parts.

Conventionally, in controlling the access to content such as copyrighted objects in a distribution system environment, and especially on an open network, it has been the practice to
10 store the content in a server accessible by the users of the content, and to control the usage of the content by controlling the access to the server. The content are defined herein as digital content having a structure as a mass of bit strings recordable in a storage medium and include documents and texts,
15 images, animation, program software, etc.

Fig. 17 is a diagram showing an example of the conventional model of access control. As shown in Fig. 17, content 204 can be operated from a user 205 only through an access control function 203. Further, a copyright holder 200 simply
20 registers the content 204, for example, in a server protected by the access control function 203, so that the access to the access control function 203 is controlled by a person other than the copyright holder 200 such as a manager of the server.

Specifically, as shown in Fig. 18, a server system 212
25 for holding the content is managed by a server operator system

211 and further managed and operated by the manager 201. The server operator system 211 registers the copyright holder and the users in the server system 212, and for this purpose, produces a directory and gives a permission for the copyright holder to control the access. A copyright holder system 210 causes the content of the copyrighted objects of the copyright holder to be stored in the server system 212 and set the access control conditions (ACL) in the server system 212. In this case, the copyright holder is required to be granted a permission for controlling the access to the server system 212. The user system 213, on the other hand, when using the content, requests the server system 212 to send the content, and in the case where the ACL is satisfied, acquires the content stored in the server system 212.

When the content user is entirely authorized, however, a change of the user due to the relocation or copying (duplication) makes the authorization of the copyright holder fail to cover the content relocated or copied, as the case may be. Further, no forcible execution of the license for access to the objects has been defined between the server manager storing the content of the objects of the copyright and the copyright holder. For example, it has been considered a matter of course for the server manager to change the accessibility without permission of the copyright holder.

On the other hand, a distribution system environment has

been promoted by price reduction of storage media, etc. to such an extent that the network traffic is not concentrated but content can be distributed to a plurality of servers in cache, thus making possible fast access to content objects. As a result, the access control model as shown in Fig. 17 requires the construction of a firm access control function only at the entrance to the operation of the content by the user 205, while an omnidirectional access control or security is required in the distributed system environment described above.

In view of this, an access control model as shown in Fig. 19 has been conceived. This access control model is divided into a copyright holder protection area where the copyright holder 200 can be protected by the conventional security technique, an open area where all external attacks are accepted, and a confidential protection area where the hardware and software are protected against alteration and duplication of digital data. The confidential protection area is protected by an omnidirectional access control function 221 in which the content 222 are stored.

The copyright holder 200 can register the content 222 and control the access to the access control function 221. The user 205 can acquire the content 222 through the access control function 221 from the open area. An inter-area protection interface 220 is for protecting the zone between the copyright holder protection area and the open area.

A specific example of the access control model in the distributed system environment shown in Fig. 19 is described in US Patent Serial No. 5339403. Japanese Unexamined Patent Publication No. 9-134311 and United States patents 5392351, 5555304 and 5796824 disclose a technique for preventing the illegal use of content by checking the equipment of the users. The conventional content usage control system will be described below with reference to these patent publications.

Fig. 20 is a diagram showing a content distribution model of the conventional content usage control system. A decode protection area and a reproduction protection area of Fig. 20 correspond to the confidential protection area shown in Fig. 18. The decode protection area is where the hardware and software are protected against alteration and the output data against duplication, and the reproduction protection area is where the digital decoded data are protected against duplication. Usage environment specifying physical elements (PCSUE) 235-1 to 235-N are physical elements for specifying the usage environment of the content, and specifically include a CPU, peripheral equipment, a removable storage medium, an IC card and the like.

In the decode protection area, the content constituting a copy of the content 233 encrypted by the copyright holder 200 based on the certificates 236-1 to 236-N of the physical element ID corresponding to the PCSUE 235-1 to

decode key Kc, which are output to the confidential protection area.

In the confidential protection area, the encrypted content decode key Kc is decoded with the physical element IDs 242-1 to 242-N thereby to obtain a content decode key Kc. The encrypted content 234 that can be acquired from the open area are decoded using the content decode key Kc, and offered as content 244 for use by the user 205.

Fig. 22 is a block diagram showing a general configuration of content usage control system corresponding to the content cacheable model shown in Fig. 21. As shown in Fig. 22, a copyright holder system 250 exists in the copyright holder protection area, a content server 251 exists in the open area, and a license server 252 and a user system 253 exist in the confidential protection area. The copyright holder system 250 encrypts the content thus produced, and the confidential content thus encrypted are stored in the content server 251.

Further, the content decode key Kc is sent to the license server 252, thus delegating the access control right to the license server 252. Further, an access control list (ACL) is set. The user system 253 sends a request to use the content to the license server 252. A group of the certificates of the physical element IDs, if not attached, are acquired upon designation by the license server 252 of the conditions for the physical elements. The certificates thus acquired are sent out

to the license server 252.

The license server 252, as shown in Fig. 21, acquires the confidential key K_p of the physical object class of the user, and decodes the group of the certificates of the physical
5 element IDs. The content decode key K_c encrypted by the decoded physical element ID is sent to the user system 253 as a license L. As a result, as far as the physical element ID of the user system 253 is coincident, the content decode key K_c is decoded, and the confidential content can be decoded by use of the content
10 decode key K_c thus decoded.

In view of the fact that the confidential content are stored in the content server 251, the user system 253 is required to receive the distribution of the confidential content from the content server 251 by separately requesting the
15 distribution thereof from the content server 251.

On the other hand, Fig. 23 is a block diagram showing a general configuration of a content usage control system for realizing a content simultaneous distribution model. In Fig. 23, the content server 251 is not existent, so that the
20 confidential content are sent to the user system 253 simultaneously with the license. As shown in Fig. 22, the confidential content are transported to a server temporally in the vicinity of the user system 253, and therefore, for acquiring the confidential content through the content server
25 251, the user system 253 only requests the usage of the content

whenever required.

Further, as compared with the content simultaneous distribution model, the proper selection of the distribution route of the content is made possible, and therefore the response time can be shortened for the user intending to acquire the content. Further, the content cacheable model has many advantages. For example, the content can be distributed in advance, separate from the license, by use of the base of the ROM medium, the broadcast or the caches in the proxy server.

In the conventional content usage control system described above, a device coincident with the physical element ID unique to the user system can basically decode the confidential content and use the content. In view of the fact that the license (conditions for permission of usage) is produced based only on the physical element ID, however, it is impossible to add the conditions for limiting the frequency of reading the content as determined by the intention of the copyright holder, to set a time limit, or to define the charging conditions. Thus, the versatile control of the content usage has been impossible.

Further, the usage environment specifying physical element is not always simplified in configuration. With a device having a complicated configuration, a specified section or part of such a device may be illegitimate. Then, even in the case where the license is produced from the usage

environment specifying physical element constituting a simply large sized device, the illegitimacy may be overlooked for a deteriorated security.

5 SUMMARY OF THE INVENTION

It is an object of this invention to provide a content usage control system in which the persons authorized to supply information including those authorized by the information creator such as a copyright holder can control the content usage in versatile way, while at the same time preventing the illegal use of the content with high accuracy, a content usage apparatus, and a computer readable recording medium for recording a program enabling the computer to execute the method of using the content.

15 According to one aspect of the present invention, a setting unit sets a license as a structure expressed by combinations of logic sums and logic products of a plurality of partial licenses for the content based on the ID information of the physical elements of the user unit including the media used in the user unit and the ID information of the user, and a usage control unit controls the usage of the content by the user unit based on the license set by the setting unit, thereby making versatile usage control possible based on the license.

Further, the partial licenses set by the setting unit
25 include the accounting conditions constituting the conditions

for the category changing in accordance with the usage state of the user unit and the user, thereby making possible a more finely detailed usage control by the user.

Further, a production unit produces, at the content of
5 the license information encrypted from the license and the content decode key by the ID information of a plurality of physical elements of the user unit including the media used in the user unit, and a user unit decodes the license information sent in accordance with the content usage request based on the
10 ID information of the physical elements due to the user unit, so that in the case where the license conditions are satisfied, the encrypted content are decoded using the content decode key.

Further, in the case where the interface between the partial licenses in the license is described with the logic
15 product, the encryption based on the ID information of the physical elements corresponding to the partial licenses is multiplied, thereby making it possible to distribute the risk of theft of the content decode key as a result of successful attack on a part of the physical elements.

20 Further, physical elements contained in a physical element are handled as a single physical element, of which the illegal use is not permitted, thereby making it possible to distribute the risk of theft of the content decode key.

Further, the content server holds the content encrypted
25 by the authorized information supplier unit on the open network,

and upon receipt of a request from the user unit for content distribution, sends the encrypted content to the user unit. As a result, the traffic jam is prevented in the system by making the most of the open network thereby making it possible to
5 acquire the content quickly.

According to another aspect of the present invention, a setting unit sets by storing in the condition storage unit of the usage control unit the license conditions expressed as a structure by a combination of logic sums and logic products of
10 a plurality of partial licenses for the content based on the ID information of the physical elements of the user unit including the media used in the user unit and the ID information of the user, and holds the decode key for the same content in the holding unit. The extraction unit receives the content
15 usage request from the user unit, extracts the license conditions and the content decode key corresponding to the user unit, and based on the ID information of the physical elements sent from the user unit, produces the license conditions encrypted from the license conditions and the content decode
20 key and sends the resulting license information to the user unit. The user unit decodes the license information sent thereto in accordance with the content usage request, based on the ID information of the physical elements due to the user unit and in the case where the license conditions are satisfied, decodes
25 the encrypted content using the content decode key.

According to still another aspect of the present invention, first, the license conditions and the content decode key are determined by decoding the license information of the content in response to the content usage request, based on the ID information of the physical elements of the content usage apparatus, and when permitted upon determination of the license conditions, the content are decoded using the decode key, thereby improving the protection ability.

According to still another aspect of the present invention, the first step is for the license conditions and the content decode key to be determined by decoding the license information of the content in response to the content usage request, based on the ID information of the physical elements of the content usage apparatus, and then when permitted upon determination of the license conditions, the content are decoded using the decode key, thereby improving the protection ability.

Other objects and features of this invention will become apparent from the following description with reference to the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a diagram showing a configuration of a content usage control system according to an embodiment of the present invention;

Fig. 2 is a flowchart showing the internal procedures of the process of a copyright holder system 20 shown in Fig. 1;

Fig. 3 is a diagram showing an example of the accounting condition and the physical environment specifying element
5 condition;

Fig. 4 is a flowchart showing the internal procedures of the process of a content server 30 shown in Fig. 1;

Fig. 5 is a flowchart showing the internal procedures of the process of a license server 40 shown in Fig. 1;

10 Fig. 6 is a diagram showing the relation between the license sent from the license server 40 and the confidential content sent from the copyright holder system 10 or the content server 30;

Fig. 7 is a diagram showing a configuration of an LDAP
15 system 42 shown in Fig. 1;

Fig. 8 is a diagram showing a layer logic structure of a specified usage environment;

Fig. 9 is a diagram showing an example of the physical elements in a containment relationship;

20 Fig. 10 is a detailed flowchart showing the procedures of the process for generating a license;

Fig. 11 is a flowchart showing the internal procedures of the process of a user system 50 shown in Fig. 1;

Fig. 12 is a flowchart showing the procedures of the
25 process for decoding the license by usage relation specifying

physical elements;

Fig. 13 is a flowchart showing the procedures of the process for decoding the license by physical elements of a reproduction device;

5 Fig. 14 is a diagram showing an example of a license decoding step;

Fig. 15 is a data flow diagram showing the process of decoding the content by the request for the license and the acquisition of the license;

10 Fig. 16 is a diagram showing the effect that each processing procedure incorporated in each entity of the specified usage environment has on the protection ability;

Fig. 17 is a diagram showing an access control model according to the prior art;

15 Fig. 18 is a diagram showing a general configuration of the content usage control system corresponding to the access control model according to the prior art;

Fig. 19 is a diagram showing an improved access control model;

20 Fig. 20 is a diagram showing a content distribution model of the content usage control system according to the prior art;

Fig. 21 is a diagram showing content cacheable model;

Fig. 22 is a diagram showing a general configuration of the content usage control system corresponding to the content
25 cacheable model shown in Fig. 21; and

Fig. 23 is a diagram showing a general configuration of the content usage control system for realizing the content simultaneous distribution model.

5 DESCRIPTION OF THE PREFERRED EMBODIMENTS

A content usage control system, a content usage apparatus and a computer readable recording medium having recorded therein a program for enabling the computer to execute a method of using the content usage apparatus will be explained with
10 reference to the accompanying drawings.

Fig. 1 is a diagram showing a configuration of a content usage control system according to an embodiment of the invention. A content usage control system 10 shown in Fig. 1 is for
15 controlling the usage by the user 2 of the content of a copyrighted object produced by a copyright holder 1. In Fig. 1, the content usage control system 10 roughly comprises a copyright holder system 20, a content server 30, a license server 40 and a user system 50.

The copyright holder system 20 includes a confidential
20 content registration section 21 for performing the process of encrypting the content and registering the confidential content in the content server 30 (S10), an access control right delegation section 22 for delegating the access control right by sending to the license server 40 the content decode key
25 required for decoding the encrypted content (confidential

content) (S12) and an ACL setting section 23 for setting the usage permit conditions, i.e. the license (ACL) in the license server 40 (S14), thereby managing the usage control of the content of copyrighted objects.

5 The content server 30 registers the confidential content sent from the copyright holder system 20 and in response to a confidential content distribution request (S16) from the user system 50, sends out to the user system 50 the registered confidential content in encrypted form (S17).

10 The license server 40 includes a license permission/production section 41 and an LDAP system 42. In response to a content usage request from the user system 50 (S18), the license permission/production section 41 searches the LDAP system 42 for the physical element ID certificate added to the
15 usage request and the corresponding decode key, decodes the physical element ID, searches for the content decode key corresponding to the content of which the usage is requested, and sends the license encrypted from the content decode key thus searched, by the physical element ID (S21).

20 This license is a physical environment specifying element condition and is structured in the form of a combination of logic sums and logic products corresponding to the structure of the physical elements. Further, according to this embodiment, the accounting condition based on the usage state of the user is
25 also encrypted as an ACL as well as the physical environment

specifying element condition conventionally used. This encryption and decoding of the license will be described later. In the case where the physical element ID certificate is not attached to the usage request (S18) nor is it available in the LDAP system 42, the physical element condition designation (S19) is sent to the user system 50 and the group of the physical element ID certificates produced by the user system 50 is returned (S20).

On the other hand, the content decode key, if sent by delegation of the access control right from the copyright holder system 20 (S12), is registered as an item corresponding to the confidential content in the data base of the key 44 in the LDAP system 42 described later. Further, the ACL setting, if sent from the copyright holder system 20 (S14), is stored as an item corresponding to the confidential content in an access control list (ACL) in the LDAP system 42.

The user system 50 includes a confidential content request/acquisition section 51 for requesting the distribution of the confidential content (S16) and acquiring the confidential content distributed, a license request/acquisition section 52 for requesting the license, i.e. the usage (S18) and processing the license acquisition (S21), and a specified usage environment (SUE) 53 for the user system. The specified usage environment 53 is defined as a specified content usage environment constituting general information

including a CPU, peripheral equipment, a removable storage medium, an IC card, content usage state and the like.

The specified usage environment includes usage environment specifying physical elements (PCSUE) such as CPUs
5 54-1 to 54-N, content storage devices 55-1 to 55-M for storing the content, and reproduction devices 56-1 to 56-L such as players and viewers. Each of the PCSUEs 54-1 to 54-N, each of the content storage devices 55-1 to 55-M and each of the reproduction devices 56-1 to 56-L has physical element IDs 57-1
10 to 57-N, 59-1 to 59-M and 61-1 to 61-L, respectively, and also encryption/decoding/evaluation sections 58-1 to 58-N, 60-1 to 60-M and 62-1 to 62-L, respectively.

The encryption/decoding/evaluation sections 58-1 to 58-N, 60-1 to 60-M and 62-1 to 62-L encrypt each physical element with
15 the physical element ID of the corresponding physical element, and decodes each physical element with the physical element ID of the corresponding physical element, further followed by the evaluation of the decoding result. In other words, each physical element ID is processed for each physical element not
20 to leak information even on the interface between physical elements.

The process of operating the copyright holder system 20, the content server 30, the license server 40 and the user system will be explained primarily with reference to a flowchart.
25 First, referring to the flowchart of Fig. 2, the internal

processing procedures of the copyright holder system 20 will be explained.

As shown in Fig. 2, the copyright holder system 20 first determines whether an operation event has occurred or not (step S100). In the case where no operation event has occurred (NO in step S100), the process is repeated until an operation event occurs. In the case where an operation event has occurred (YES in step S100), on the other hand, it is determined whether the content of the operation of the operation event is the registration of the confidential content, the ACL registration or the delegation of the right to control the access (step S101).

In the case where the content of the operation is the registration of the confidential content (confidential content registered in step S101), the confidential content registration section 21 encrypts the content (step S110), designates the desired content server 30 from the content server list (step S111), and requests the registration of the confidential content in the designated content server 30 (step S112). After that, upon receipt of a response from the content server 30, it is determined whether the particular response is OK or an error (step S113).

It is determined whether the next content server has been designated or not (step S115), directly in the case where the response from the content server 30 is OK, or after the error processing (step S114) in the case where the response is an error.

In the case where the next content server is designated (YES in step S115), the process proceeds to step S112 and the above-mentioned steps are repeated. In the case where the next content server is not designated (NO in step S115), on the other hand, the process proceeds to step S100 for repeating the steps described above.

In the case where the content of operation are setting the ACL (set ACL in step 101), the ACL setting section 23 further determines whether the designated content decode key is registered or not (step S120), while in the case where the content key is not registered (NO in step S120), the error processing is conducted (step S124), followed by proceeding to step S100 for repeating the above-mentioned process. In the case where the content decode key is registered (YES in step S120), on the other hand, the ACL set request is sent to the license server 40 (step S122), and the ACL registration result is received from the license server 40 (step S123), after which the process proceeds to step S100 for repeating the steps described above.

In the case where the content of the operation are the delegation of the right to control the access (delegate the access control right in step S101), on the other hand, the encrypted content decode key is sent to the license server 40 (step S130), and the registration result of the encrypted content decode key is received (step S131), followed by

proceeding to step S100 for repeating the same steps.

An explanation will be given of the ACL settings by the ACL setting section 23. Fig. 3 is a diagram showing an example of access conditions which are of two types including the accounting condition and the physical environment specifying element (PCSUE) condition. As shown in Fig. 3, the accounting condition which is one of the features of the present invention includes maxCount (maximum number of operable sessions) and the corresponding content usage state (number of completely operated sessions). The intention is to control, i.e. limit or approve the access by setting the limitation of the maximum number of operable sessions to a variable value in terms of the number of completely operated sessions.

The usage state of the content corresponding to the accounting condition value of the next maxLength (maximum read length) is totalLen (completely read length plus the read length to be requested), of which the intention is to control the access by the maximum read length of the content. The usage state of the content corresponding to the accounting condition value of the next maxTimeLen (maximum executable time) is totalTime (completely executed time length), of which the intention is to control the access by the maximum executable time of the content. The usage state of the content corresponding to the next accounting condition value of maxDebt (credit line (charging conditions)) is debt (outstanding amount). The

outstanding amount, if negative in value, is a debt, the intention being to control the access by the charging conditions.

The physical environment specifying element condition is the computer body first of all, and the corresponding class of the physical element ID is PSN which is a processor serial number. The class is defined herein as an object class on the data base. The next class of the physical element ID corresponding to the peripheral devices is DSN indicating the type and the serial number of the devices. The next class of the physical element ID corresponding to the medium is MSN indicating the type and serial number of the medium. The next physical element ID corresponding to the IC card is "certificates", indicating the certificates issued by the IC card.

The next information on human body parts is the fingerprints or iris information, for example, and the corresponding class of physical element ID is bodyParts which is an authentication information of the human body parts. The next class of the physical element ID corresponding to the permitted time zone is timePeriod, which is the GPS time point on the local clock or global scale. The next network domain indicates the area on the network, and the corresponding class of the physical element ID is MACAddress indicating the MAC address. The next geographical position indicates the country of usage and the corresponding class of the physical element

is "yuji" or "hata" or the number of "IC#card" is "lafd234fe4def458c3bac78497bbda6f".

Further, "print" indicates the print output condition, and only when the group is "sysrap", the content can be printed.

5 This ACL can be set arbitrarily by the copyright holder 1 from the copyright holder system 20. This ACL setting improves the operability by using the GUI. The ACL type may also be set with the operation name. For example, the access condition (1) can be selected for the operation name 1, and the access condition
10 (2) for the operation name 2, whereby the operability is further improved.

The internal processing procedures of the content server
30 will be explained below with reference to the flowchart of Fig. 4. The first step in Fig. 4 is for the content server 30
15 to determine whether a network event has been input or if input, whether it is a request for registration of the confidential content or a request for distribution of the confidential content (step S200). In the case where no network even is input (NO in step S200), on the other hand, the process of
20 determination in step 200 is repeated.

In the case where the network event is a request for registration of the confidential content (request the registration of confidential content in step S200), the confidential content of which the registration is requested are
25 registered internally (step S210), and a default ACL is set

(step S211). A response to the request for registration of the confidential content is given to the copyright holder system 20 (step S212), followed by proceeding to step S200 for repeating the same steps.

5 In the case where the network event is a request for distribution of the confidential content (request the distribution of confidential content in step S200), on the other hand, the confidential content of which the distribution is requested are distributed to the user system 50 (step S220),
10 after which the response to the request for distribution of the confidential content is sent to the user system 50 (step S221), followed by proceeding to step S200 for repeating the same steps of process. As a result, the confidential content can be distributed to the user system 50 from the copyright holder
15 system 20 secretly through the content server 30. In this case, the traffic is distributed so that fast transfer is made possible while at the same time permitting the confidential content to be held also by the content server in the neighborhood of the user system 50 in advance. Thus, the distribution
20 process can be increased in speed.

The internal procedures of the process of the license server 40 will be explained below with reference to the flowchart shown in Fig. 5. The first step in Fig. 5 is for the license server 40 to determine whether a network event
25 requesting for the content usage has been input or not (step

S300). In the case where no network event has been input (NO in step S300), the determination of step S300 is repeated.

In the case where the network event is a request for content usage (request content usage in step S300), the LDAP system 42 is searched for the ACL of the designated content (step S301), and further, the related access conditions are extracted from the ACL searched thereby to generate a new ACL (step S302). After that, it is determined whether there is available a corresponding physical element ID certificate corresponding to the extracted physical environment specifying condition (step S303). Thus, it is determined whether there is the next physical environment specifying condition (step S305), directly in the case where there is a corresponding physical element ID certificate (corresponding physical element ID certificate available in step S303), or after a request for the certificate is given to the content usage requester, i.e. the user system 50 (step S304) in the absence of the corresponding physical element ID certificate (no corresponding physical element ID certificate in step S303).

In the presence of the next physical environment specifying condition (YES in step S305), the process proceeds to step S303 in preparation for positively securing the corresponding physical element ID certificate, while in the absence of the next physical environment specifying condition (NO in step S305), a group of the physical element ID

certificates are received from the content usage requester, i.e. the user system 50.

After that, the license permission/generating section 41 searches for the designated content decode key (step S307), and
5 rearranges the access conditions in the ACL into the certificates of the forcible physical elements (step S308). Further, all the AND/OR equations in the ACL are defined in parentheses in the priority order of authentication (step S309). Then, the license permission/production section 41 performs the
10 process for generating a license based on the AND/OR equations defined in the parenthesis (step S310). The license thus generated is sent to the user system 50 (step S311), and then the process proceeds to step S300 for repeating the same process.

15 The relation between the license thus generated and the confidential content will be explained with reference to Fig. 6. Fig. 6 shows the relation between the license sent to the user system 50 from the license server 40 and the confidential content sent from the copyright holder system 20 to the user
20 system 50 through the content server 30.

In Fig. 6, system ACLs 43-1 to 43-5 corresponding the confidential content 71 to 75, respectively, are stored in the ACL 43 of the license server 40. Based on this system ACL, licenses 84 to 86 corresponding to the confidential content 71
25 to 73, for example, are generated and sent to the user system.

the usage environment specifying element 109 at the same time.

Fig. 9 shows the correspondence between the OS kernel layer 111 and the device layer 112 of the usage environment specifying physical element (PCSUE). As shown in Fig. 9, the PCSUES have an inclusion relation to each other. This is also the case of course with other devices of the device layer 112. The PCSUES 133, 134 are located at a level lower than the PCSUE 131, for example, and the PCSUES 135, 136 are located at a lower level than the PCSUE 134. The PCSUES mutually having this inclusion relation can exchange information such as the physical element ID.

The PCSUE of the media reproduction section such as the DVD, for example, includes the PCSUE of the media such as the DVD, so that the content data and the media ID information are exchanged between them. The information exchange between PCSUE 134 and PCSUE 135 is an example. Only the PCSUE at the highest level exchanges data with the PCSUE driver. The relation between PCSUE driver 120 and PCSUE 131 is an example. Thus, even the devices in the same device layer may have an inclusion relation and hence a hierarchical relation to each other.

The license is information permitting a specified environment, and includes only the information unique to the client environment of which the license is requested, i.e. the environment of the user system. It is the access information

including the ACL and the content decode key Kc encrypted by the physical element ID (PCSUE-ID).

An example of the multiple license is shown below.

$$\{ \{ \{ \{ \{ \langle \text{access information} \rangle K_5 \} K_4 \} K_3 \} K_2 \} K_1 \} \quad (1)$$

5 where K1 to K5 are PCSUE-IDs, respectively. This license is coupled by the AND conditions using K₁ to K₅. The access information can be encrypted in multiplex way using each PCSUE-ID in the descending order of security ability of the physical elements. The decoding operation is performed
10 sequentially from the outside PCSUE-ID.

Further, in the case where the security ability of the physical elements is substantially the same, each PCSUE-ID can be decoded by a password key resulting from the calculation of exclusive OR. For example, the formula shown below is used.

$$\{ \langle \text{access information} \rangle \{ K_5 \oplus K_4 \oplus K_3 \oplus K_2 \oplus K_1 \} \} \quad (2)$$

15 The multiplication of the encryption can distribute the risk of theft of the content decode key Kc which otherwise might result from the successful attack on a part of the products, i.e. a part of the physical elements.

20 Further, assume the case in which a plurality of PCSUE-IDs are coupled by OR operators, as shown in the formula below.

$$\begin{aligned} & \{ \langle \text{access information} \rangle \} K_5 + \{ \langle \text{access information} \rangle \} K_4 + \\ & \{ \langle \text{access information} \rangle \} K_3 + \{ \langle \text{access information} \rangle \} K_2 + \\ & \{ \langle \text{access information} \rangle \} K_1 \end{aligned}$$

25 In this case, the sublicense encrypted by each PCSUE-ID or, for

example, {<access information>}K_i is generated, and the value obtained by coupling all the sublicenses by simple OR operation can be used as a license. The multiplication of the encryption described above can be applied to each sublicense, so that AND, XOR and OR operations are combined in nest relation to generate a license. This can also produce the effect of risk distribution.

The steps of process for generating such a license will be explained with reference to the flowchart of Fig. 10. The flowchart shown in Fig. 10 represents a subroutine of the steps of the process for generating a license shown in step S310 of Fig. 5. In Fig. 5, first, one word is read out of the ACL described above (step S400). Then, it is determined whether the word read out is '(' or not (step S410).

In the case where the word read out is '(' ('(' in step D410), the current read position of the ACL is stored as a starting point of the ACL in the parenthesis (step S411). After that, the variable NB is set to zero (step S412), and further one word is read out of the ACL (step S413). Then, it is determined whether the word read out is '(' or not (step S414), and if '(', one is added to the variable NB (step S415), after which the process proceeds to step S413 for reading the next one word again.

In the case where the word read out is not '(' (OTHERWISE in step S414), on the other hand, it is determined further

S400 and one word is further read out of the ACL.

In the case where the word read out is not the physical condition or the accounting condition (OTHERWISE in step S410), it is further determined whether the word read out is "OR" or not (step S430). In the case where the word read out is "OR", the process is performed for generating a license of the ACL from and subsequent to the particular word (step S441). After that, it is further determined whether the AC is contained in the license generated (step S442), and if the AC is included (YES in step S442), a license is set for [AC, hash] Kp, return value] using the return value for the license generating process in step S441 (step S443), and the license thus generated is returned (step S454). In the case where no AC is contained in the license (NO in step S442), on the other hand, a license is set for [Kc, AC, hash] Kp, return value] using the return value for the license generating process in step S441 (step S445), and the license thus generated is returned (step S454).

In the case where the word read out is not "OR" (OTHERWISE in step S430), in contrast, it is further determined whether the word read out is "AND" or not (step S440). In the case where the word read out is "AND", the ACL license generating process from and after this word is performed (step S452), and a license for [return value, AC, hash] Kp] is returned using the return value of the particular license generating process (step S454).

Further, in the case where the word read out is not "AND"

00000-9791259
5 (OTHERWISE in step S440), a license for $\{Kc, AC, hash\} Kp$ is returned (step S454). As a result, a license is generated from the ACL.

The internal procedures of the process of the user system
5 50 will be explained with reference to the flowchart shown in Fig. 11. In Fig. 11, the first step is for the user system 50 to determine whether a request for content usage has been issued or not (step S500). In the case where no request for content usage is issued (NO in step S500), the same determination
10 process is repeated. In the case where a request for content usage is issued (YES in step S500), on the other hand, the content usage request is sent (step S501). After that, it is determined whether a request for a certificate of a physical element has been issued from the license server 40 (step S502), and if there
15 is no request for the certificate of the physical element (NO in step S502), the process proceeds to step S508.

In the case where the request for a certificate of a physical element is issued (YES in step S502), on the other hand, the physical element ID certificate is read out (step S503),
20 and it is determined whether the read operation has failed or not (step S504). In the case where the read operation is a failure (YES in step S504), an error notice is sent to the license server (step S505), and the process proceeds to step S500. In the case where the read operation is not a failure (NO in step
25 S504), on the other hand, it is determined whether the next

physical element is available or not (step S506), and if available (YES in step S506), the process proceeds to step S503 where the next physical element ID certificate is read out and the process described above is repeated.

5 In the absence of a next physical element (NO in step S506), on the other hand, a group of the physical element ID certificates are sent to the license server 40 (step S507), and it is further determined whether the received data is an error or a license (step S508). In the case where the received data
10 is an error (ERROR in step S508), the process proceeds to step S500 for repeating the same process as described above, while in the case where the received data is a license (LICENSE in step S508), the license is further delivered to the physical element (PCSUE) 1 (step S509), followed by proceeding to step
15 S500 to repeat the same process as described above. As a result, the user system 50 can acquire a license from the license server 40.

The PCSUE 1 is indicative of the first one of (N - 1) PCSUEs. A general expression of PCSUE is PCSUE_i where *i* is an integer
20 of 1 to (N - 1). The internal procedures of the process performed when the license is delivered to each PCSUE_i will be explained with reference to the flowchart of Fig. 12.

In Fig. 12, the first step is for the PCSUE_i is to decode the received license with K_{pi} (step S600). After that, the
25 decoded access condition AC_i is evaluated (step S601), and it

00000-94512560

is determined whether the evaluation result of the access condition ACi is good or not (step S602). In the case where the evaluation result of the access condition ACi is not good (NOT GOOD in step S602), the error processing is effected (step
5 S604) to end the process. In the case where the evaluation result of the access condition ACi is good (GOOD in step S602), on the other hand, the decoded license is transmitted to the PCSUE(i+1) to continue the decoding operation, thus terminating the internal processing of the PCSUEi.

10 Then, in PCSUE(i+1), which corresponds to PCSUE(N), the physical element of the reproduction device performs the internal processing, for example. The steps of this internal processing procedure will be explained with reference to the flowchart shown in Fig. 13. In Fig. 13, the first step is to
15 decode the received license with Kpn (step S700). After that, the decoded access condition AC(N) is evaluated (step S701), and it is determined whether the result of this evaluation is good or not (step S702). In the case where the result of evaluation is not good (NOT GOOD in step S702), the error
20 processing is performed (step S703) thereby to end the process, resulting in the failure to decode the confidential content.

In the case where the result of evaluation of the access condition AC(N) is good (GOOD in step S702), on the other hand, the confidential content are decoded with the decoded Kc (step
25 S704), and the decoded content are reproduced by the

reproduction device (step S705) thereby to end the process.

A specific license decoding process will be explained with reference to Fig. 14. In Fig. 14, the license generated by the license server 40 is encrypted by encrypting the access control list ACL and the content decode key using the key Kp constituting the physical element ID of the reproduction device 144. The license is further encrypted using, as a key, the value of the exclusive OR of the DSN 141 constituting the serial number of the storage device and the MSN 143 constituting the serial number of the medium 142.

First, the storage device 140 reads the inhibit write MSN in the medium 142, and the exclusive OR is calculated between the same value and the DSN of the storage device 140, and according to the calculation result, the license is decoded into {ACL, Kc}Kp. This partially decoded license is sent to the reproduction device 144, which in turn decodes the license using the key Kp constituting the physical element ID of the reproduction device 144 itself, thus acquiring the access condition list ACL and the content decode key Kc. In the case where the access condition indicated by the access condition ACL is satisfied, the content decode key Kc can be used for decoding, and the decoded content are reproduced by the reproduction device 144.

The process of decoding the content by requesting and acquiring the license described above will be explained in more

detail with reference to the data flow shown in Fig. 15. In Fig. 15, in the decode protection area of the user system 50, the license request process 152 is sent to the license server 40 with the physical element ID certificate in order to use the content. In the process, the physical element ID certificate is acquired from the usage environment specifying physical element 150 by the usage environment specifying physical element certificate acquisition process 153 and delivered by the license request process 152.

Upon transmission of the license from the license server 40, on the other hand, the license acquisition process 156 acquires the license and the access permit process 155 acquires the license from the license acquisition process 156. At the same time, the usage environment specifying physical element ID authentication process 154 acquires the physical element ID through the usage environment specifying physical element certificate acquisition process 153 and further the usage state from the accounting process 157, so that the decode key is retrieved using these results.

The content decoding process 159 decodes the confidential content 158 using the content decode key and outputs the content of ordinary sentences. The accounting process 157 notifies the usage state monitor physical element 151, whereby the current usage state is automatically decremented in accordance with the usage by the usage environment monitor physical element 151.

Fig. 16 is a diagram showing the effect that each processing step incorporated in each entity of the specified usage environment shown in Fig. 8 has on the protection ability. From this result, it is seen to be preferable to incorporate the processing steps in the device layer for generating the usage environment specifying physical element certificate and to incorporate the processing steps in the device layer with the IC card for protecting the accounting information. In this way, the protection ability is varied depending on the layer incorporating the processing steps. Therefore, each processing function shown in Fig. 15 is required to be incorporated taking the layer arrangement into consideration.

In the foregoing explanation of embodiments, what is called the content cacheable model is used as a standard configuration. However, the invention is not limited to such a configuration, but a content simultaneous distribution model can be apparently also used as a standard configuration. In such a configuration, the content server 30 is regarded to have been arranged in the license server 40.

Further, the foregoing embodiments assume the use of a key as a prerequisite for encryption and decoding. In such a case, either the confidential key encryption method or the public key encryption method can be used appropriately in accordance with the individual systems to which the invention is applicable.

Further, the physical elements shown in the embodiments described above include portable recording media such as the CD-ROM, DVD, MO, IC card and floppy disk used with the user system, as well as the device unique to the user system 50. The user system using such a portable recording medium includes not only the physical elements unique to the user system but also the portable recording medium as a physical element for controlling the usage of the content. The media unique to the user system 50, such as a built-in hard disk drive or a built-in ROM is of course also included in the physical elements described above.

As described above, in one aspect of this invention, the setting unit sets a license as a structure expressed by combinations of logic sums and logic products of a plurality of partial licenses for the content based on the ID information of the physical elements of the user unit including the media used in the user unit and the ID information of the user, and the usage control unit controls the usage of the content by the user unit based on the license set by the setting unit, thereby making versatile usage control possible based on the license. Therefore, a versatile content usage control based on the license conditions is made possible.

Further, the partial licenses set by the setting unit include the accounting conditions constituting the conditions for the category changing in accordance with the usage state of the user unit and the user. Therefore, the content usage

control can be effected in more finely detailed fashion and versatile way for users.

Further, the production unit produces, at the content the license information encrypted from the license and the content decode key by the ID information of a plurality of physical elements of the user unit including the media used in the user unit, and the user unit decodes the license information sent in accordance with the content usage request based on the ID information of the physical elements due to the user unit, so that in the case where the license conditions are satisfied, the encrypted content are decoded using the content decode key. Therefore, the content usage control with high protection ability is realized.

Further, in the case where the interface between the partial licenses in the license is described with the logic product, the encryption based on the ID information of the physical elements corresponding to the partial licenses is multiplied, thereby making it possible to distribute the risk of theft of the content decode key as a result of successful attack on a part of the physical elements.

Further, physical elements contained in a physical element are handled as a single physical element, of which the illegal use is not permitted, thereby making it possible to distribute the risk of theft of the content decode key.

Further, the content server holds the content encrypted

by the authorized information supplier unit on the open network,
and upon receipt of a request from the user unit for content
distribution, sends the encrypted content to the user unit. As
a result, the traffic jam is prevented in the system by making
5 the most of the open network thereby making it possible to
acquire the content quickly.

In another aspect of this invention, the setting unit sets
by storing in the condition storage unit of the usage control
unit the license conditions expressed as a structure by a
10 combination of logic sums and logic products of a plurality of
partial licenses for the content based on the ID information
of the physical elements of the user unit including the media
used in the user unit and the ID information of the user, and
holds the decode key for the same content in the holding unit.

15 The extraction unit receives the content usage request from the
user unit, extracts the license conditions and the content
decode key corresponding to the user unit, and based on the ID
information of the physical elements sent from the user unit,
produces the license conditions encrypted from the license
20 conditions and the content decode key and sends the resulting
license information to the user unit. The user unit decodes
the license information sent thereto in accordance with the
content usage request, based on the ID information of the
physical elements due to the user unit and in the case where
25 the license conditions are satisfied, decodes the encrypted

content using the content decode key. Therefore, the encryption and decoding for the versatile content usage control can be specifically realized.

In still another aspects of this invention, the request unit transmits the ID information of the physical elements of the content usage apparatus and the ID information of the user to the content management device in accordance with the content usage request, after which the license information sent by the content management device in response to the content usage request are decoded based on the ID information of the physical elements of the content usage apparatus thereby to determine the license conditions and the content decode key, and when permitted upon determination of the particular license conditions, decodes the content using the decode key, thereby improving the protection ability. Therefore, the content usage control with high protection ability is made possible.

In still another aspect of the invention, first, the license conditions and the content decode key are determined by decoding the license information of the content in response to the content usage request, based on the ID information of the physical elements of the content usage apparatus, and when permitted upon determination of the license conditions, the content are decoded using the decode key, thereby improving the protection ability. Therefore, the content usage control with higher protection ability is made possible.

Although the invention has been described with respect to a specific embodiment for a complete and clear disclosure, the appended claims are not to be thus limited but are to be construed as embodying all modifications and alternative constructions that may occur to one skilled in the art which
5 fairly fall within the basic teaching herein set forth.

WHAT IS CLAIMED IS:

1. A content usage control system which controls the usage of content supplied by an authorized information supplier including a content producer who is also the information
5 producer and those persons authorized by the information producer, said system comprising:

a user unit which enables the user to use the content;

a setting unit which sets a license as a structure expressed by a combination of logic sums and logic products of
10 a plurality of partial licenses for the content based on the ID information of the physical elements of said user unit including the media used in said user unit and the ID information of the user; and

a usage control unit which controls the usage of the
15 content by said user unit based on the license set by said setting unit.

2. The content usage control system according to claim 1, wherein the partial licenses set by said setting unit include
20 the accounting condition constituting the condition for a category changing with the usage state of said user unit and the user.

3. The content usage control system according to claim 1,
 in which said usage control unit includes a unit for producing,
 at the request of the user unit to use the content, the license
 information encrypted from the license and the content decode
 5 key by the ID information of a plurality of physical elements
 of said user unit including the media used in said user unit,
 in which said user unit decodes the license information
 sent in accordance with the content usage request, based on the
 ID information of the physical elements due to said user unit,
 10 and in the case where the license conditions are satisfied, the
 encrypted content are decoded by use of the content decode key.

4. The content usage control system according to claim 3,
 wherein said production unit encrypts by multiplexing the ID
 15 information of the physical elements corresponding to the
 partial licenses of the license in the case where the interface
 of the partial licenses is described by the logic product.

5. The content usage control system according to claim 1,
 20 wherein the physical elements include those included in other
 physical elements.

6. The content usage control system according to claim 1,
 further comprising a content server which holds the content
 25 encrypted by the authorized information supplier unit on an open

network, and sends the encrypted content to said user unit upon receipt of a request to distribute the content from said user unit.

5 7. A content usage control system which controls the usage of the content supplied by the authorized information supplier including a content producer who is also the information producer and the persons authorized by the information producer, said system comprising:

10 a user unit which requests the usage of the content, and decoding the encrypted content using the content decode key in the case of satisfying the license conditions obtained by decoding the license request sent in accordance with the content usage request, based on the ID information of the physical
15 elements of the user unit;

a setting unit which sets a license expressed as a structure by a combination of logic sums and logic products of a plurality of partial licenses for the content based on the ID information for the physical elements of said user unit
20 including the media used in said user unit and the ID information for the user;

a conditions storage unit which stores the license conditions set by said setting unit;

a holding unit which holds said content decode key;

25 an extraction unit which receives the content usage

request from said user unit and extracts the license conditions and said content decode key corresponding to said user unit; and

a production unit which produces the license information by encrypting the license conditions and said content decode key based on the ID information of the physical elements sent from said user unit and sends the license information to said user unit.

8. A content usage apparatus connected to a network for enabling the user to use the content, said apparatus comprising:

a request unit which transmits an ID information of the physical elements of said content usage apparatus and an ID information of the user to an external content management apparatus which manages the content in response to a content usage request;

a unit which decodes the license information transmitted by said content management apparatus, using the ID information of the physical element of said content usage apparatus in response to the content usage request, and determines the license conditions and the content decode key; and

a unit which decodes the content using the decode key when permitted upon determination of the license obtained.

when permitted upon determination of the license conditions determined.

11. A computer readable recording medium which stores a
5 program executed by the computer of the content usage apparatus
for enabling the user to perform the operations comprising the
steps of:

determining license conditions and a content decode key
by decoding the license information of the content based on an
10 ID information of the physical elements of said content usage
apparatus in response to the content usage request; and

decoding the content using the decode key when permitted
upon determination of the license conditions.

ABSTRACT OF THE DISCLOSURE

A content usage control system comprises a copyright holder system, content server, license server and user system. The ACL setting section of the copyright holder system sets a
5 license ACL expressed as a structure by a combination of logic sums and logic products of a plurality of partial licenses for the content, based on the user ID and a plurality of physical element IDs including media used in the user system, and stores the license ACL in an access control list. The license server
10 controls the usage of the content by the user utilizing the access control list.

FIG. 1

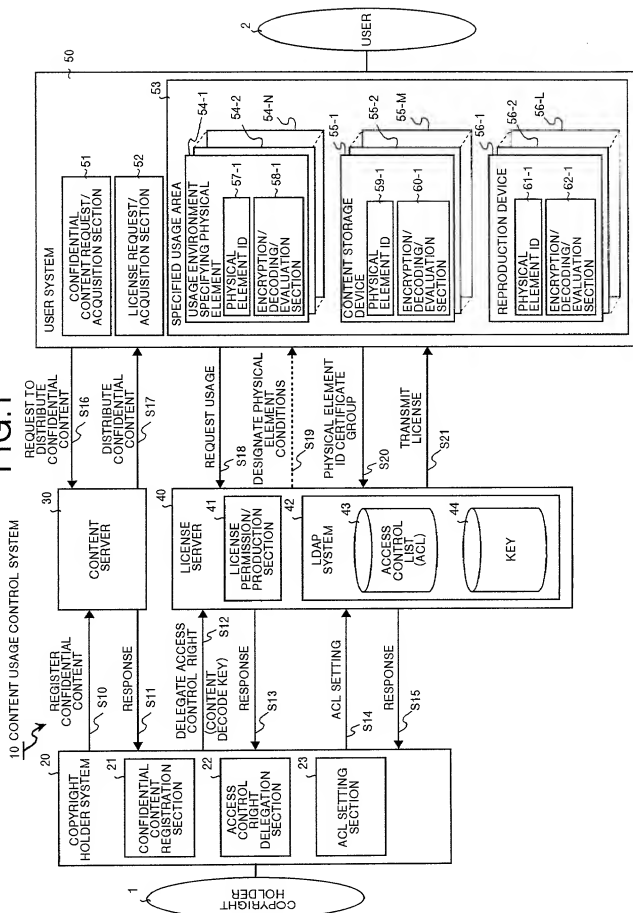


FIG.2

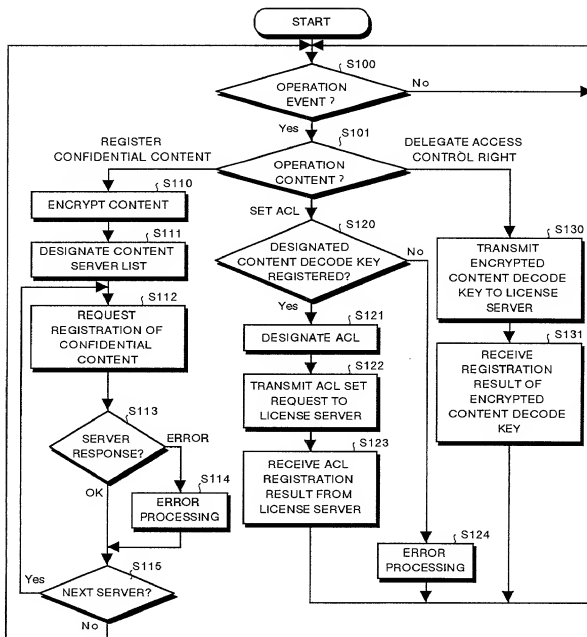


FIG.3

ACCOUNT CONDITION VALUE	USAGE STATE
Max Count : MAXIMUM NUMBER OF OPERABLE SESSIONS	count : COUNT OF NUMBER OF OPERATIONS COMPLETE
Max Length : MAXIMUM READ LENGTH	totalLen : READ LENGTH PLUS REQUESTED READ LENGTH
max TimeLen : MAXIMUM EXECUTABLE TIME	totalTime : EXECUTED TIME LENGTH
max Debt : CREDIT LINE (CHARGING CONDITION)	debt : OUTSTANDING AMOUNT(DEBT WHEN NEGATIVE)

PHYSICAL ENVIRONMENT SPECIFYING ELEMENT (PCSUE) CONDITION	PHYSICAL ELEMENT ID CLASS (PCSUE-IDClass)
(1) COMPUTER BODY	PSN (PROCESSOR SERIAL NUMBER)
(2) PERIPHERAL DEVICES	DSN : DEVICE TYPE, SERIAL NUMBER
(3) MEDIA	MSN : MEDIA TYPE, SERIAL NUMBER
(4) IC CARD	certificates : CERTIFICATES ISSUED BY IC CARD
(5) HUMAN BODY PARTS (FINGERPRINTS, IRIS, etc.)	body Parts : BODY PARTS (FINGERPRINTS, IRIS, etc.) AUTHENTICATION INFORMATION
(6) PERMITTED TIME ZONE	time Period : TIME POINT (LOCAL CLOCK, GPS, etc.)
(7) NETWORK DOMAIN	MACAddress : MAC ADDRESS
(8) GEOGRAPHICAL POSITION (COUNTRY OF USAGE, etc.)	location : GPS/PHS DETECTION POSITION
(9) HUMAN MEMORY	user-ID WithPwd : USER ID AND PASSWORD
(10) GROUP	group : SET OF PHYSICAL ELEMENT IDS

FIG.4

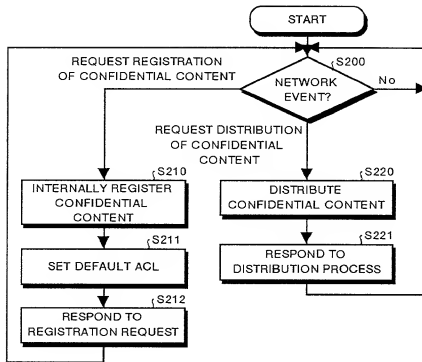


FIG.5

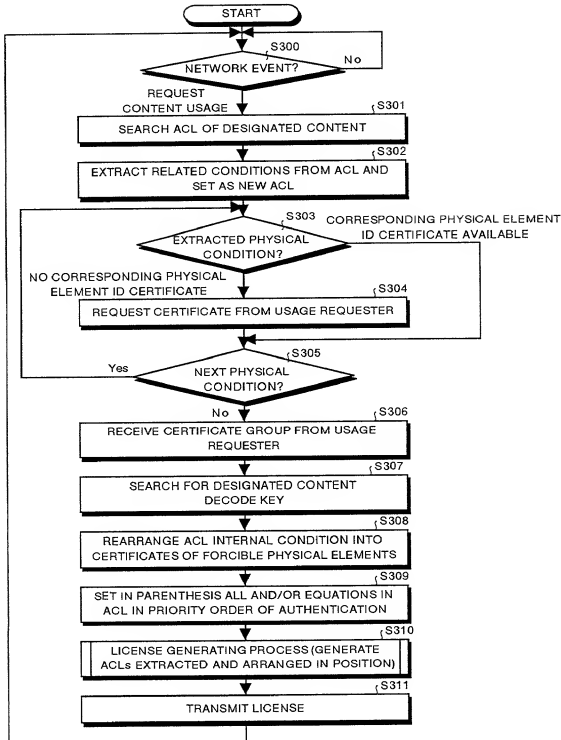


FIG. 6

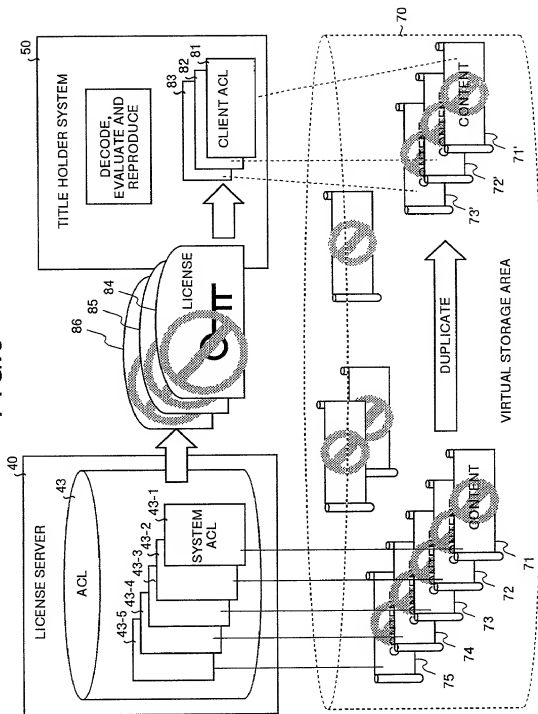


FIG. 7

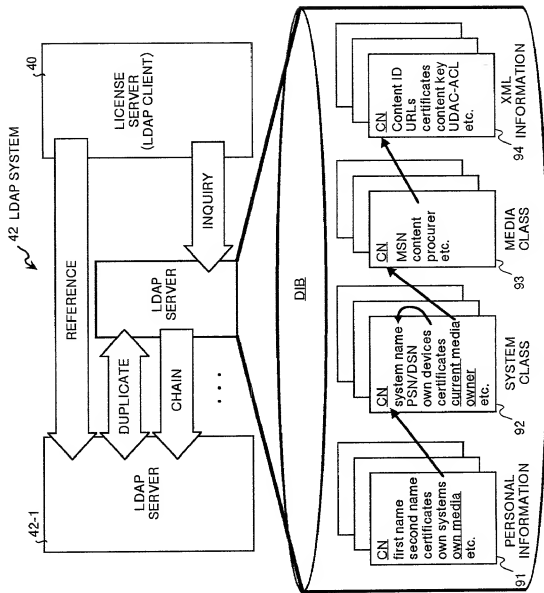


FIG. 8

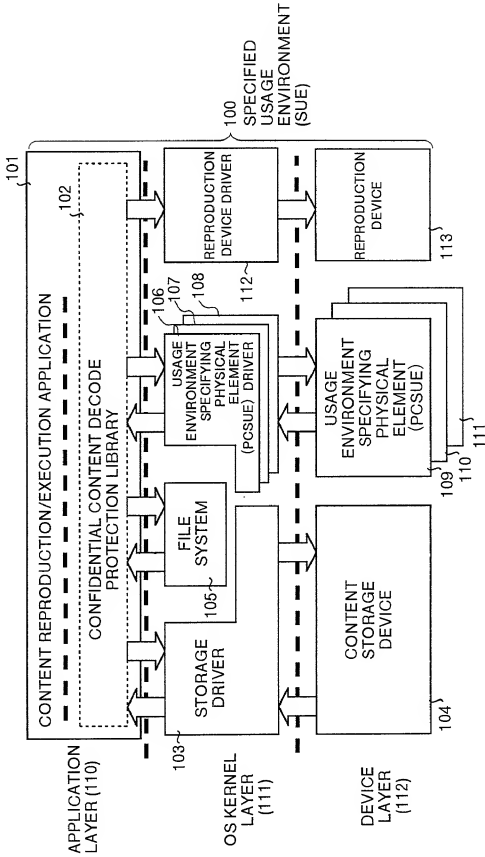


FIG.9

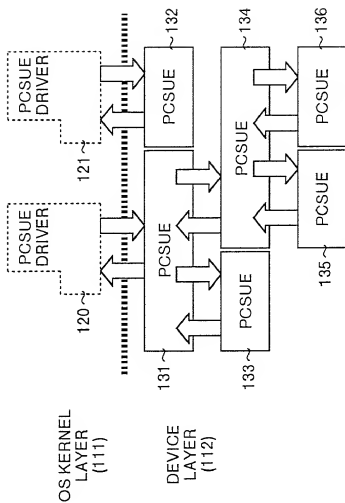


FIG. 10

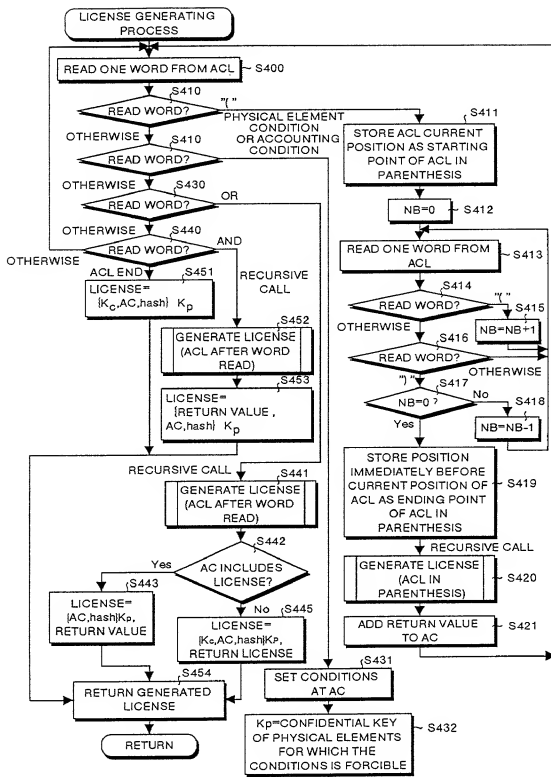


FIG.11


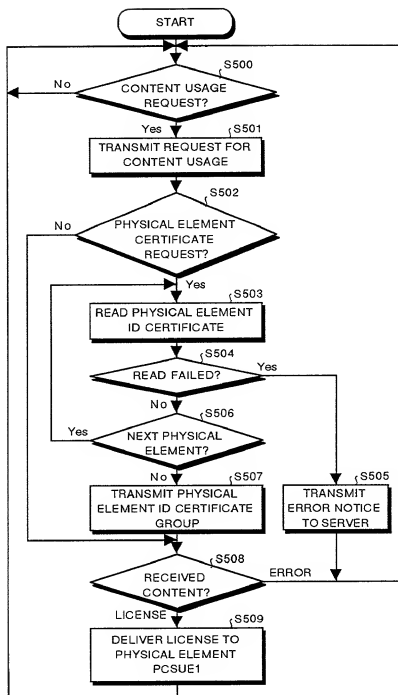


FIG.13

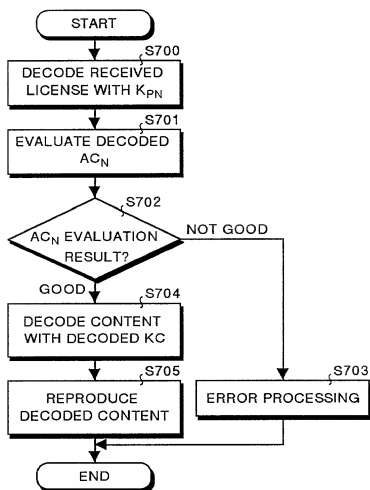

00000-9492260

FIG.14

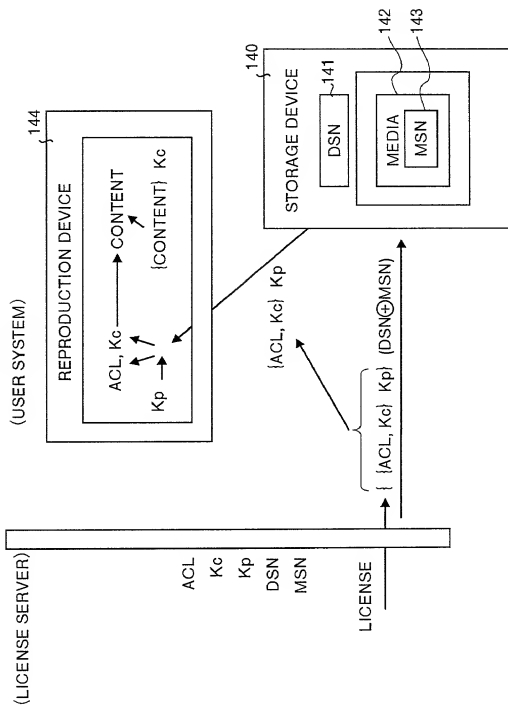


FIG.15

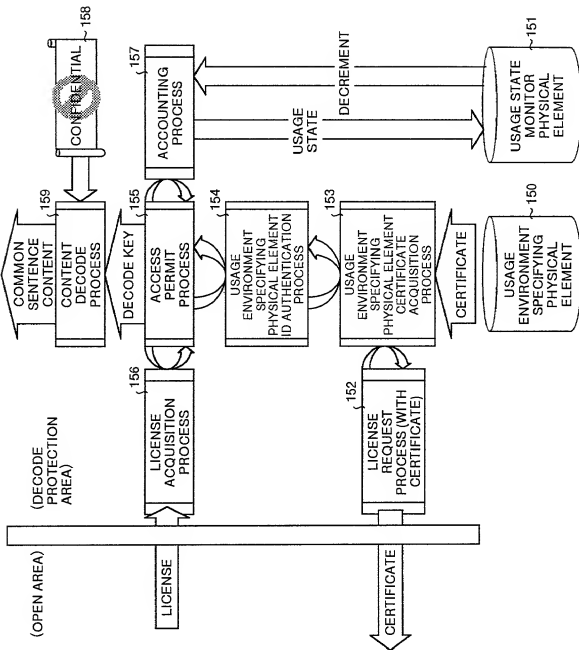


FIG.16

	APPLICATION LAYER	DEVICE DRIVER LAYER	DEVICE LAYER
GENERATION OF USAGE ENVIRONMENT SPECIFYING PHYSICAL ELEMENT OWNERSHIP CERTIFICATE	—	○	⊙
AUTHENTICATION OF USAGE ENVIRONMENT SPECIFYING PHYSICAL ELEMENT ID	○	—	—
SEARCH OF ACCESS CONTROL LIST	○	—	○
PROTECTION OF ACCORDING INFORMATION	△	—	⊙ (IC CARD)
CONDITIONAL ACCESS PERMISSION	○	—	○
DECODE	○	—	○

— : INCORPORATION NOT SO MEANINGFUL

△ : DANGEROUS

○ : PROTECTION NOT TIGHT FOR PROFESSIONAL

⊙ : PROTECTION TIGHT

FIG.17

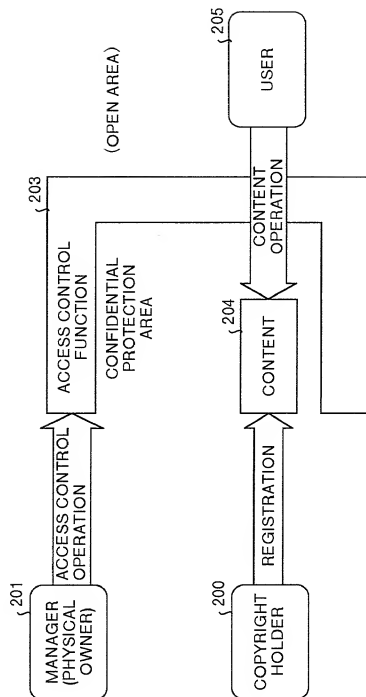


FIG.18

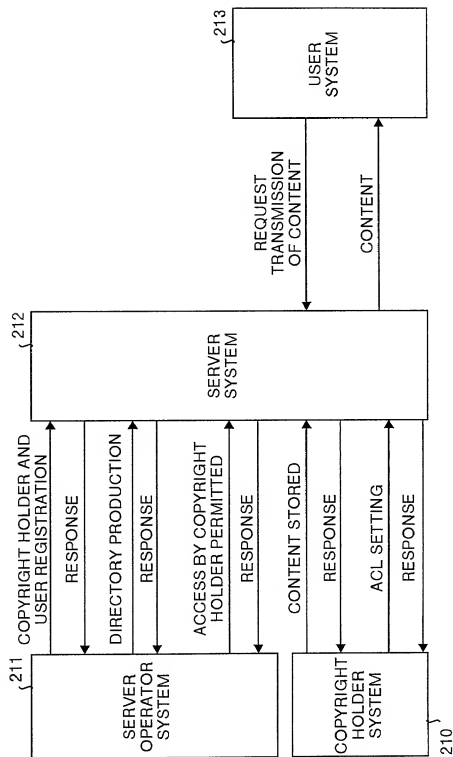


FIG.19

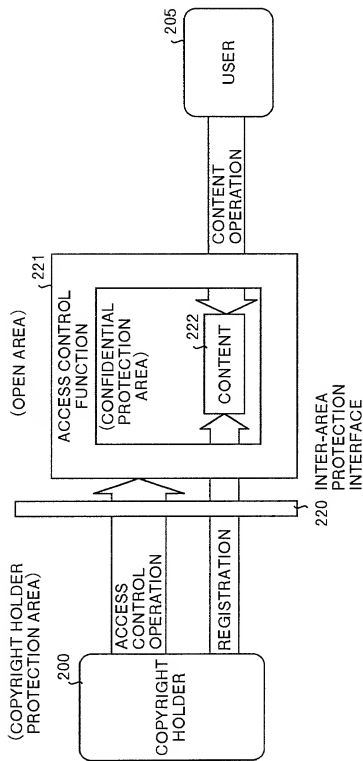


FIG.20

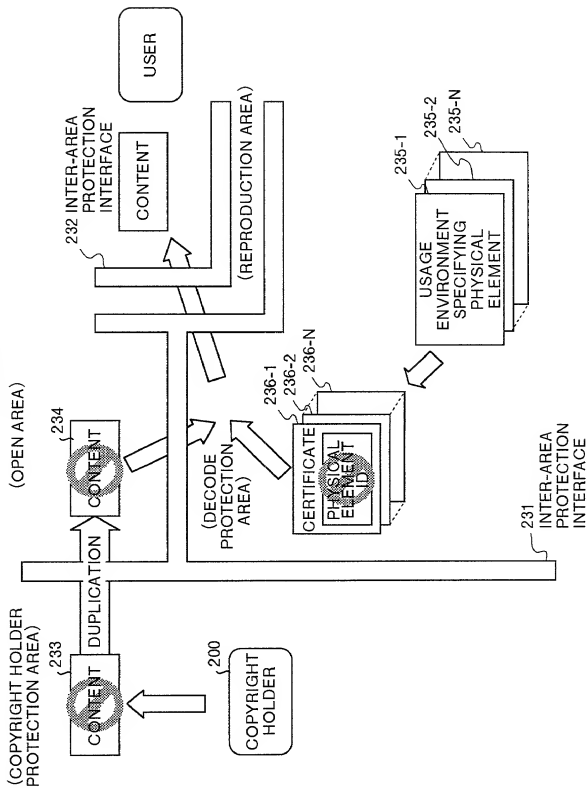


FIG.21

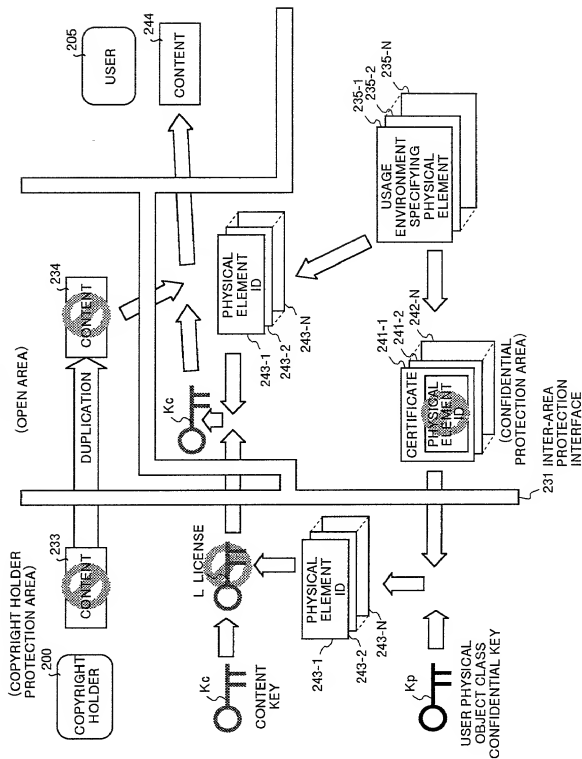


FIG.22


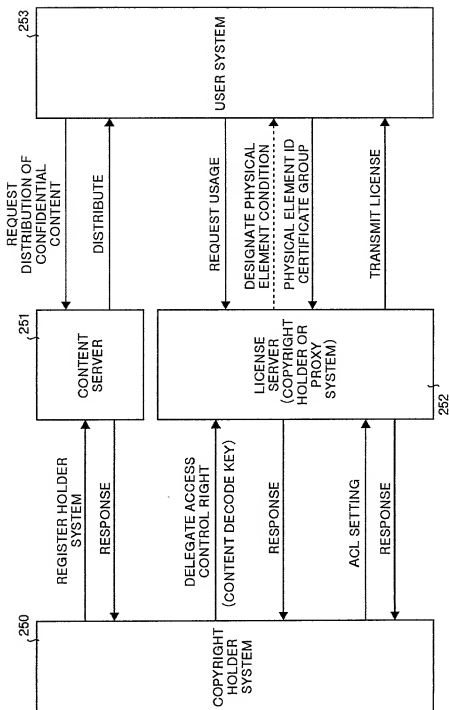


FIG.23

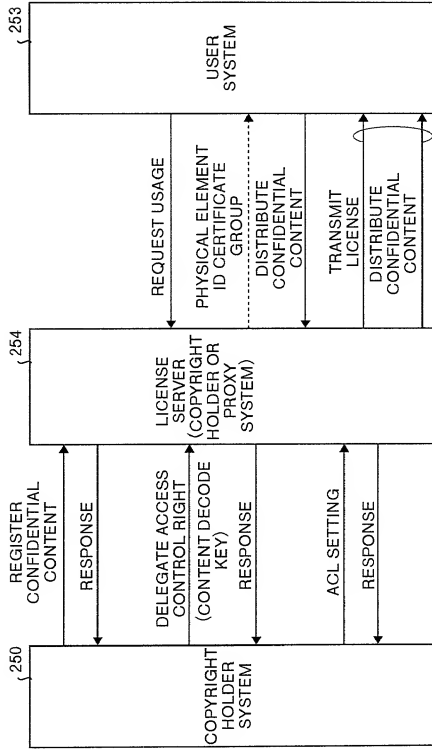

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Declaration and Power of Attorney For Patent Application

特許出願宣言書及び委任状

Japanese Language Declaration

日本語宣言書

下記の氏名の発明者として、私は以下の通り宣言します。

As a below named inventor, I hereby declare that:

私の住所、私曹籍、国籍は下記の私の氏名の後に記載された通りです。

My residence, post office address and citizenship are as stated next to my name.

下記の名称の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者であると（下記の名称が複数の場合）信じています。

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

CONTENT USAGE CONTROL SYSTEM
CONTENT USAGE APPARATUS
COMPUTER READABLE RECORDING
MEDIUM WITH PROGRAM RECORDED FOR
COMPUTER TO EXECUTE USAGE METHOD

上記発明の明細書（下記の欄でx印がついていない場合は、本書に添付）は、

the specification of which is attached hereto unless the following box is checked:

☐ 月 日に出発され、米国出願番号または特許協定条約
国際出願番号を とし、
(該当する場合) に訂正されました。

☐ was filed on _____
as United States Application Number or
PCT International Application Number
_____ and was amended on
_____ (if applicable).

私は、特許請求範囲を含む上記訂正後の明細書を検討し、
内容を理解していることをここに表明します。

I hereby state that I have reviewed and understand the contents of
the above identified specification, including the claims, as
amended by any amendment referred to above.

私は、連邦規則法典第37編第1条56項に定額されると
おり、特許資格の有無について重要な情報を開示する義務が
あることを認めます。

I acknowledge the duty to disclose information which is material to
patentability as defined in Title 37, Code of Federal Regulations,
Section 1.56.

私は、米国法典第35条119条(a)-(d)項又は365条(b)項に基き下記の、米国外の国の少なくとも一か国を指定しての特許係力条約365(a)項に基き国際出願、又は外国での特許出願もしくは発明者の特長についての外国優先権をここに主張するとともに、優先権を主張している、本出願の前に出願された特許または発明者の特長外国出願を以下に、枠内をマークすることで、示しています。

Japanese Language Declaration (日本語宣言書)

委任状: 私は下記の発明者として、本出願に関する一切の手続きを米特許商標局に対して遂行する弁理士または代理人として、下記の者を指名いたします。(弁理士、または代理人の氏名及び登録番号を明記のこと)

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith (list name and registration number)

Attorney
 Patrick G. Burns
 Roger D. Greer
 Lawrence J. Crain
 Steven P. Fallon

Reg. No.
 29,367
 26,174
 31,497
 35,132

Attorney
 James K. Folker
 Jonathan D. Feuchtwang
 B. Joe Kim
 Joel H. Bootzin

Reg. No.
 37,538
 41,017
 41,895
 42,343

直接電話連絡先: (名前及び電話番号)

Send Correspondence to:

Direct Telephone Calls to: (name and telephone number)

Patrick G. Burns, Esq.
 Greer, Burns & Crain, Ltd.
 Sears Tower - Suite 8660, 233 S. Wacker Dr.
 Chicago, IL 60606 (312) 993-0080

唯一または第一発明者名	Full name of sole or first inventor
Takahisa HATAKEYAMA	
発明者の署名	Inventor's signature
日付	Date
Takahisa Hatakeyama	Feb. 23, 2000
住所	Residence
Kanagawa, Japan	
国籍	Citizenship
Japanese	
私書箱	Post Office Address
c/o FUJITSU LIMITED	
1-1, Kamikodanaka 4-chome,	
Nakahara-ku, Kawasaki-shi,	
Kanagawa 211-8588 Japan	
第二共同発明者	Full name of second joint inventor, if any
Makoto YOSHIOKA	
第二共同発明者	Second inventor's signature
日付	Date
Makoto Yoshiooka	Feb. 23, 2000
住所	Residence
Kanagawa, Japan	
国籍	Citizenship
Japanese	
私書箱	Post Office Address
c/o FUJITSU LIMITED	
1-1, Kamikodanaka 4-chome,	
Nakahara-ku, Kawasaki-shi,	
Kanagawa 211-8588 Japan	

(第三以降の共同発明者についても同様に記載し、署名をすること)

(Supply similar information and signature for third and subsequent joint inventors.)

第三共同発明者		Full name of third joint inventor, if any Yuji MIYAZAWA	
第三共同発明者	日付	Third inventor's signature <i>Yuji Miyazawa</i>	Date Feb. 23, 2000
住 所		Residence Kanagawa, Japan	
国 籍		Citizenship Japanese	
私書箱		Post Office Address c/o FUJITSU LIMITED 1-1, Kamikodanaka 4-chome, Nakahara-ku, Kawasaki-shi, Kanagawa 211-8588 Japan	
第四共同発明者		Full name of fourth joint inventor, if any	
第四共同発明者	日付	Fourth inventor's signature	Date
住 所		Residence	
国 籍		Citizenship	
私書箱		Post Office Address	

第五共同発明者		Full name of fifth joint inventor, if any	
第五共同発明者	日付	Fifth inventor's signature	Date
住 所		Residence	
国 籍		Citizenship	
私書箱		Post Office Address	
第六共同発明者		Full name of sixth joint inventor, if any	
第六共同発明者	日付	Sixth inventor's signature	Date
住 所		Residence	
国 籍		Citizenship	
私書箱		Post Office Address	

(第七以降の共同発明者についても同様に記載し、署名をすること)

(Supply similar information and signature for seventh and subsequent joint inventors.)